

niftylift NIFTYLIFT HR28BE

BI-ENERGY 4WD ARTICULATING BOOM



Versatile, fuel efficient & environmentally conscious


SiOPS® as standard

Foam filled tyres

180° platform rotation and 150° fly boom gives improved operator access

40% gradeability

All wheel drive (AWD) for rough terrain

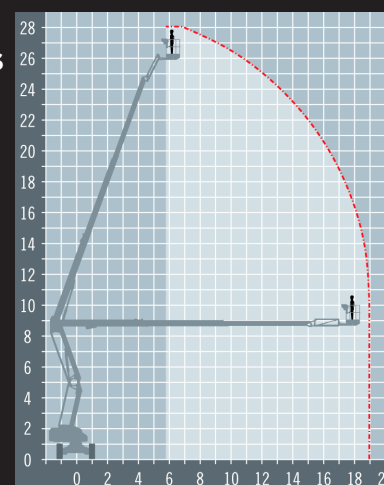

TECHNICAL DATA

SIZE	METRIC	IMPERIAL
Reach height	28m	91ft 10in
Platform height	26m	85ft 4in
Up and down	8.4m	27ft 7in
Horizontal reach	19m	62ft 4in
Stowed height	2.7m	8ft 10in
Length x width*	9.28m x 2.49m	30ft 5in x 8ft 2in
Platform size	2.48m x 0.9m	7ft 10in x 2ft 11in
Weight	14650kg	32298lb
Lift capacity	280kg	617lb

*Length and width shown are when stowed.

FEATURE



HYBRID POWERED
Diesel and Battery power for flexibility



IPAF 3b
Requires IPAF category 3b



OUTDOOR RATED
Wind rated for outdoor use



NON MARKING TYRES
Prevents marking to finished floors



ROUGH TERRAIN
4 wheel drive for uneven ground

A range of extra's for 'Hire or Purchase' designed to give you the GTAdvantage™



STOP NUISANCE BORROWING WITH GTA SECURE™



OPERATOR TRAINING FOR THIS ACCESS PLATFORM



DOUBLE POINT HARNESSES TO KEEP YOU SAFE



STAY FULLY CHARGED WITH TRANSFORMERS AND LEADS

For more information about GTAccess: please contact us and send us an email

