

niftylift **NIFTYLIFT SD120**
SELF DRIVE WORK PLATFORM

ALTERNATIVES:
Hinowa GL1570



Highly effective Bi-Energy system increases flexibility and maximises utilisation in a wider range of environments


45% gradeability

Fully proportional hydraulic controls for lift and drive

Hydraulic outriggers for leveling on uneven ground

Telescopic upper boom for greater accuracy when positioning the platform

Weight Saving Design

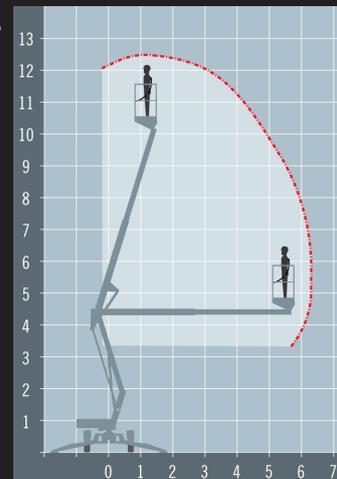

TECHNICAL DATA

SIZE	METRIC	IMPERIAL
Reach height	12.65m	41ft 6in
Platform height	10.65m	34ft 11in
Up and down	4.3m	14ft 1in
Horizontal reach	6.1m	20ft 0in
Stowed height	1.95m	6ft 5in
Length x width	3.9m x 1.56m	12ft 10in x 5ft 1in
Deployed Width	3.2m	10ft 6in
Platform size	1.1m x 0.65m	3ft 7in x 2ft 2in
Weight	2260kg	4982lb
Lift capacity	200kg	441lb

*Stowed travel size is 3.9 x 1.56 m (12' 10" x 5' 1").

FEATURE



HYBRID POWERED

Diesel and Battery power for flexibility



IPAF 1b

Requires IPAF category 1b



OUTDOOR RATED

Wind rated for outdoor use



NON MARKING TYRES

Prevents marking to finished floors



ROUGH TERRAIN

4 wheel drive for uneven ground



LEVELLING JACKS

Levels the machine for use

A range of extra's for 'Hire or Purchase' designed to give you the **GTAdvantage™**

For more information about GTAccess: please contact us and send us an email



STOP NUISANCE BORROWING WITH GTA SECURE™



OPERATOR TRAINING FOR THIS ACCESS PLATFORM



DOUBLE POINT HARNESSES TO KEEP YOU SAFE



STAY FULLY CHARGED WITH TRANSFORMERS AND LEADS

